

PA 1225040

REC'D 11 OCT 2004

WIPO

PCT

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

September 16, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/508,577


FILING DATE: October 03, 2003

EP 104 / 10871

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS

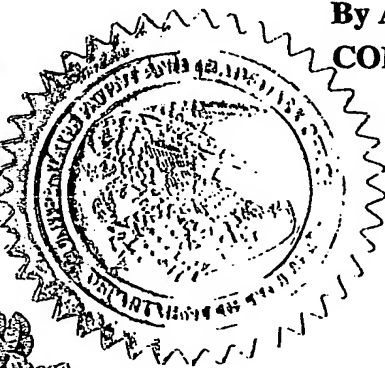

T. Lawrence

T. LAWRENCE
Certifying Officer

05909 U.S. PTO

05909 U.S. PTO

PROVISIONAL APPLICATION COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION under 37 C.F.R. § 1.53(e)

Docket Number:
45051-00044USPL

Type a plus sign (+)
inside this box →

+

22284 U.S. PTO
60/508577

100303


| INVENTOR(S)/APPLICANT(S) | | | |
|---|-----------------------|----------------|--|
| LAST NAME | FIRST NAME | MIDDLE INITIAL | RESIDENCE (CITY AND EITHER STATE OR FOREIGN COUNTRY) |
| SVENSSON | Mats | | Valdemars väg 98 SE- 224 74 Lund, Sweden |
| | | | |
| | | | |
| | | | |
| TITLE OF THE INVENTION: Deinterleaving Algorithm | | | |
| CORRESPONDENCE ADDRESS: Stanley R. Moore Jenkins & Gilchrist, P.C. 1445 Ross Avenue, Suite 3200 Dallas | | | |
| (STATE) TEXAS | (ZIP CODE) 75202-2799 | (COUNTRY) USA | |
| ENCLOSED APPLICATION PARTS (check all that apply): | | | |
| <input checked="" type="checkbox"/> Specification | Number of Pages | 18 | <input type="checkbox"/> Small Entity Statement |
| <input checked="" type="checkbox"/> Drawings | Number of Figures | 8 | <input type="checkbox"/> Other : _____ |
| <input checked="" type="checkbox"/> A check in the amount of \$160 is enclosed to cover the provisional application filing fees. <input type="checkbox"/> The Commissioner is hereby authorized to charge or credit any over or under payments of filing fees to Deposit Account Number: 10-0447 | | | Filing Fees Due for Provisional Application: <input checked="" type="checkbox"/> \$160.00 <input type="checkbox"/> \$80.00 |

Was the invention made by an agency of the United States Government or under a contract with an agency of the United States government?

☒ No.

☐ Yes, and the name of the U.S. Government agency and the government contract number(s) are:

Respectfully submitted,



DATE

October 3, 2003

NAME Stanley R. Moore

REGISTRATION NO.

(if appropriate)

26,958

☐ Additional inventors are being named on separately numbered sheets attached hereto.

PROVISIONAL APPLICATION FILING ONLY

Applicant(s) herein make claim to a new and useful process, machine, manufacture, or composition of matter, or any new and useful improvement thereof as substantially shown or described herein.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventor(s): Mats SVENSSON
Title of Invention: Deinterleaving Algorithm
Attorney Docket No.: 45051-00044USPL

Mail Stop Provisional Patent Application
Commissioner for Patents
Post Office Box 1450
Alexandria, Virginia 22313-1450

Dear Madam or Sir:

CERTIFICATE OF MAILING BY EXPRESS MAIL

"EXPRESS MAIL" Mailing Label No.: EV 226 939 762 US
Date of Deposit: October 3, 2003

I hereby certify that this paper, including the documents referred to therein, or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR § 1.10 on the date indicated above and is addressed to:

Mail Stop Provisional Patent Application
Commissioner for Patents
Post Office Box 1450
Alexandria, Virginia 22313-1450

Type or Print Name: Carla Elkins

Signature: Carla Elkins

**TRANSMITTAL LETTER FOR A PROVISIONAL PATENT APPLICATION
UNDER 37 C.F.R. § 1.53(c)**


- ☒ Transmitted herewith is a Provisional Patent Application under 37 C.F.R. § 1.53(c) as identified above.
- ☐ Transmitted herewith is an Assignment to Telefonaktiebolaget LM Ericsson (publ) along with Form PTO-1595 Assignment Recordation Sheet. **Please return the recorded assignment to the undersigned.**
- ☐ The assignment recording fee under 37 C.F.R. § 1.21(h) of \$40.00 is herewith enclosed.
- ☐ Applicant(s) claim(s) small entity status under 37 CFR 1.9 and 1.27.
- ☒ The filing fee for a Provisional Patent Application under 37 C.F.R. § 1.16(k) in the amount of \$160 is herewith enclosed.
- ☒ **TOTAL FEE REQUIRED** **\$ 160**

- ☐ Please charge our Deposit Account No. 10-0447 in the amount of \$_____.
This document is attached in duplicate.
- ☒ A check in the amount of \$160 is attached. Please charge any deficiency or credit any overpayment to Deposit Account No. 10-0447.
- ☒ The Commissioner is hereby authorized to charge any underpayment or credit any overpayment of the following fees which may be associated with this communication to Deposit Account No. 10-0447.
- ☒ Any additional provisional patent application processing fees or surcharges under 37 C.F.R. §§ 1.16 or 1.17.
- ☒ The Commissioner is hereby authorized to charge any underpayment or credit any overpayment of the following fees due during the entire pendency of this application to Deposit Account No. 10-0447.
- ☒ Any provisional patent application processing fees under 37 C.F.R. §§ 1.16-1.20.

Respectfully submitted,

Date:

Oct 3, 2003

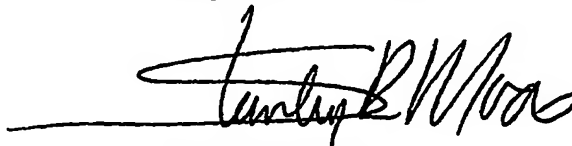

Stanley R. Moore
Registration No. 26,958

JENKENS & GILCHRIST, P.C.
1445 Ross Avenue, Suite 3200
Dallas, Texas 75202-2799
Telephone: (214) 855-4713
Facsimile: (214) 855-4300

030929 LB C:\P\1074 Ericsson\P1109_A_FAST_IN-PLACE_DEINTERLEAVING\FP28740109_030929_inlmmad.mskom EP.doc

1

DEINTERLEAVING ALGORITHM

Technical Field of the Invention

The present invention relates to the field of data processing, and more particularly to the field of sorting a
5 sequence of data items into a desired order.

Description of Related Art

It is known to interleave digital data for transmission from one electronic device or unit to another,
10 to minimize the effect of errors and enhance data recoverability. Interleaved digital data received at an electronic device is deinterleaved and digital-to-analog converted before the analog signal may be rendered as e.g. an audio signal. The loss of consecutive data items in the
15 interleaved transmission stream will not, in general, correspond to consecutive errors in the deinterleaved data sequence. This is advantageous because it is easier to correct isolated data errors in a data stream.

A conventional deinterleaver receives and stores in a
20 first memory area an interleaved stream of data items to be rendered. The deinterleaving process then transfers the interleaved data items from the first memory area to a second memory area where they are arranged in the order in which they are to be read, or grouped into a number of sets
25 of data items.

A problem with the conventional deinterleaver is that two memory areas are used, each of a capacity sufficient to store the entire sequence of data items being deinterleaved.

30 A sequence of interleaved audio data items, such as a WAV file or a decompressed WMA file, is often provided with samples intended for the right and left channels alternating in the sequence. When deinterleaving the sequence, the left and right channel samples are separated
35 into sets of continuous samples. Moreover, such buffers are

030929 18 01/1674 Ericsson/P1189_A_FAST_IN-PLACE_DEINTERLEAVING161618740187_130929_inlined_attachment_EP.doc

2

of even length having an equal number of right and left channel samples. Furthermore, the demands on processing speed for deinterleaving audio data are often quite strict. If processing of interleaved data is not finished before a well-defined deadline, the resulting distortion may very easily be perceived by a human being.

Portable electronic devices, such as a mobile radio terminal, a mobile telephone, a personal digital assistant, a smartphone, an electronic organizer, or a multimedia player have limited battery capacity, processing capability, and memory capacity available to render a digital data file comprising interleaved data items. Thus a trade-off between memory capacity and processing capability has to be done. If memory consumption for an algorithm lowers, the execution time increases.

There are known deinterleaving algorithms that require no extra memory. According to these algorithms, if the data items are interleaved in a specific way, the position of neighboring data items are switched a number of times, wherein data items relating to a first and a second set of data items are grouped together. However, such deinterleaving algorithms are computationally complex (time consuming), and require a high processing capacity. The processing time required to deinterleave the data items using this switching algorithm may be as high as proportional to the square of the number of data items in the sequence. In order for an algorithm to scale well, it is desirable that the processing time is almost linearly proportional to the number of data items of the sequence of data items.

WO 01/82054 discloses a method for sorting a sequence of data items stored in a memory with reduced memory requirement. The data items of the memory are deinterleaved by reading a first data item and overwriting a second data item with said first data item. The second data item may

030922 LD G:\V1674 Ericsson\PA169_A_FAST-IN-PLACE_DEINTERLEAVING\B\016199_016229_inlntmad asstcan 20.25g

3

not be overwritten until it has been properly read. A
separate flag memory is provided to keep track of that a
specific data item has been properly read. Thus, additional
memory is required, and the data processing involves
5 setting the flags of the flag memory.

Summary of the Invention

It is an object of the invention to provide a method
and an apparatus, with which an array or sequence of
10 interleaved data items stored in a number of memory
locations of a memory may be deinterleaved in-place in said
memory, such that there is no need for any additional
memory to perform the deinterleaving.

It is a second object of the invention to provide a
15 method and an apparatus wherein the processing time for
deinterleaving the sequence of data items is substantially
linear to the number of data items within said sequence.

According to a first aspect of the invention, the
above objects are achieved by a method for processing data.
20 According to the method, an array or sequence of data items
is sorted from a first order to a second order. At least
one data item having a first position is withdrawn from the
sequence of data items. A destination position for the
withdrawn data item is determined within the sequence.
25 Also, it is determined whether the destination position
contains any data item. If so, the data item of the
destination position is replaced with the withdrawn data
item. Otherwise, the first data item is inserted at the
determined destination position directly.

30 Withdrawing the first data item will create a hole in
the sequence or array, in which the correct data will be
inserted after a number of repositioning sequences for
repositioning data items.

According to the method, if the destination position
35 contains no data item, it is determined whether all data

030929 10 G10P11974 EricssonP1199_A_FAST_IN-PLACE_OF_INTERLEAVINGP119710101_030929_inplace_method (P).doc

4

items of the sequence of data items are positioned at their correct positions. Also, at least one incorrectly positioned data item to reposition is sought if the data items of said sequence of data items are not positioned correctly. The incorrectly positioned data item is then repositioned.

The destination position of a data item may be calculated based on the index of the source position of the data item within the sequence of data items and the number of data items within the sequence. Alternatively, the data items may be numbered such that their correct position within the sequence may be determined.

Two data items may be repositioned in each sequence of steps. Furthermore, the method may be an in-place method carried out within a memory (110) having a set of memory locations. Consequently, there is no need for any extra memory.

The sequence of data items comprises an even number of data items, and a number of data items relating to a first set of data items of said sequence is equal to the number of data items relating to a second set of data items of said sequence.

The first data items to be repositioned in the same repositioning sequence may be selected as one data item relating to each of the first and second sets of data items. Also, the two first data items are selected as any other data items than the first and last data items of the sequence of data items, which are already in their correct positions given that the vector was interleaved with data items relating to the first and second set of data items alternately. Furthermore, the two first data items to be repositioned may be selected as the data items stored at the center positions of said sequence of data items, to achieve symmetry.

030929 18 C:\P1173 Ericsson\01189_1_FAST_IN_PLACE_DEINTERLEAVING\01189_030929_inplace_onscan 57.doc

5

According to a second aspect of the invention, the above objects are achieved by a processing device for sorting an array of data items from a first order to a second order. The processing device comprises a memory
5 having a set of memory locations for storing the sequence of data items, and a processor for sorting the data items. The processor is adapted to carry out the method of the invention.

The processor may comprise a register file in which
10 data items may be temporarily stored. The memory comprises an even number of memory locations for storing data items.

The processing device according to the invention may be comprised in a mobile radio terminal, a mobile telephone, a personal digital assistant, a pager, a
15 smartphone, a communicator, an electronic organizer, or a multimedia player for rendering digital multimedia files.

According to a third aspect of the invention, a computer program product embodied on a computer readable medium, comprising computer readable instructions to carry
20 out the method of the invention when run by an electronic device having digital computer processing capabilities achieves the objects of the invention.

Further embodiments of the invention are defined in the dependent claims.

25 It is an advantage of the invention that it may be used in environments wherein requirements on memory consumption and processing time are strict. The method according to the invention may be used without the need of any additional memory and is still sufficiently fast in
30 order to provide deinterleaved audio data. The method may be carried out in-place in the memory (i.e. no extra memory is needed). Furthermore, the method may be executed in linear time, i.e. the time required to process the input data is directly proportional to the size of the input
35 data.

010929 LE 0:\P\1874 Ericsson\F\189_A_FAST-IN-PLACE_DEINTERLEAVING\F\18740189_010929_inlmod_1810kps ED.doc

6

It should be emphasized that the term
"comprises/comprising" when used in this specification is
taken to specify the presence of stated features, integers,
steps or components but does not preclude the presence or
5 addition of one or more other features, integers, steps,
components or groups thereof.

Brief Description of the Drawings

Further objects, features, and advantages of the
10 invention will appear from the following description of
several embodiments of the invention, wherein various
aspects of the invention will be described in more detail
with reference to the accompanying drawings, in which:
Fig. 1 is a front view of a mobile terminal;
15 Fig. 2 is a block diagram of a processing device
according to the invention connected to an audio path;
Fig. 3 is schematic block diagram illustrating a
first embodiment of memory locations of a memory and data
items stored therein;
20 Fig. 4 is a flowchart of one embodiment of the method
for sorting data items according to the invention;
Fig. 5 is a schematic block diagram illustrating a
second embodiment of memory locations of a memory and data
items stored therein;
25 Fig. 6 is a flowchart of a second embodiment of the
method for sorting data items according to the invention;
Fig. 7 is a flowchart of a method for determining the
destination position of a data item; and
Fig. 8 is a flowchart of a method for determining if
30 a vector having a certain length is acceptable according to
the invention.

Detailed Description of Embodiments

Fig. 1 illustrates a mobile terminal 1 comprising a
35 man-machine interface for operating the terminal. The man-

030929 LS C:\FV1074 Release00\PI127_A_FAST_N-PLACE_USINTERDEAV-INGICP;0740133_030929_inlamed anis00as EF.doc

7

machine interface may comprise a microphone 10, a
loudspeaker or an earphone 11, a keypad 12, and a display
13. Furthermore, the mobile terminal 1 may comprise
communication means for communicating with a network and
5 with another electronic device, such as a computer, a
personal digital assistant, a communicator, an external
multimedia player, such as an MP3 player, or a smartphone.
The communication means may comprise a first antenna 14 for
communicating with a communication network, such as a
10 telecommunication network according to e.g. the GSM/GPRS,
the UMTS (using e.g. WCDMA and EDGE technology), or the
cdma2000 standard, over a wireless communication link. The
mobile terminal may also comprise a short-range
supplementary antenna 15 for communicating with a wireless
15 local area network, such as according to Bluetooth[®]
standards, or a means 16 for establishing an infrared (IR)
connection with another electronic device. The mobile
terminal 1 may also comprise an accessory connector 17, to
which an external device, such as an MP3 player, may be
20 connected either directly or through a serial cable. The
communication means also comprises various circuitry for
communicating using the communication interfaces, such as
modulators, demodulators, amplifiers, transmitters,
receivers, etc.

25 Reference is made to a mobile terminal or mobile
telephone 1 in the following. However, the invention is not
limited to a mobile terminal 1, but can be incorporated
into any electronic device having a need for sorting data
items of a memory or a buffer. Such electronic devices may
30 comprise, but is not limited to, a mobile radio terminal, a
mobile telephone, a pager, a communicator, an electronic
organizer, a smartphone, a computer, or a multimedia player
for rendering digital multimedia files, such as an MP3
player.

030929 13 01/11/2003 cricetna/p1111_1_FAST-13-PEACE_0010702-2AVING\1011111111_010929_inlined anadkan 2P.doc

8

The mobile terminal 1 according to the invention is adapted to render a multimedia file, preferably a digital audio file, such as an MP3, WMA, AMR, AAC, PCM, Ogg Vorbis, or ATRAC 3 file. The multimedia file may comprise coded data for rendering audio. The coded data have to be decoded, and possibly post processed (e.g. deinterleaved), before being rendered. In case of PCM (Pulse Code Modulation) data, the data may be provided by an external source in an interleaved fashion, wherein data items intended for the right and left audio channel are separated into two sets of data items. This may also apply to the data stream that is output by the decoder in case of encoded data (e.g. WMA) is provided. The data items are provided, and may be stored before being deinterleaved, alternating one sample for each channel.

With data item when referred to in this description is meant a single digital data bit or a set of interrelated digital data bits. The interrelated data bits may together form e.g. an audio sample, which may be rendered when converted into an analog signal.

With interleaved data items when used in this specification is meant data items relating to two or more different sets of data items, such as relating to a left or right audio channel, which are arranged in a list or array alternating one sample relating to each of the sets of data items. In the array of data items, the first and the last data items are always positioned at their correct position, and do not need to be repositioned. In the following, reference is made to two sets of data items. However, the invention may also be adapted to sorting data items relating to more than two sets of data items. If so, having an even number of sets of data items achieves symmetry, wherein it will be easier to locate any data item to reposition, as will be discussed below.

010929 LN 010710Z PRICED/F1185 A PART IN-PLACE DEINTERLIZING/F16740189 010929 informed ensoken EV.doc

Deinterleaved data items when used in this specification are data items relating to the first or the second set of data items, which have been so positioned within a array of data items such that the data items of each set are grouped together in a consecutive order within the array. The data items relating to the first set may e.g. appear first in the array, whereas the data items relating to the second set appear last in the array.

Fig. 2 illustrates a multimedia decoder 100 according to the invention. The multimedia decoder 100 comprises a first input means for receiving an input file, such as an interleaved digital audio file, from an external source. The external source may be a memory within the mobile terminal, or a separate source having transmitted the data items over any of the wireless or wire based communication interfaces. Furthermore, the multimedia decoder comprises a second input means for receiving commands for rendering the input file. Such commands may e.g. comprise a "play", a "pause", a "stop", a "rewind", and a "forward" command executed by a user of the mobile terminal 1 through the man-machine interface.

The multimedia decoder 100 comprises a memory or buffer 110 for temporarily storing received data items, which are to be deinterleaved. The number of memory locations of the memory (110) dedicated to the buffer is predetermined, as will be disclosed in the following. The memory may be a random access memory (RAM) for temporarily storing data items. Furthermore, the memory 110 may be provided as a dedicated area on a chip, on which the multimedia decoder 100 may be provided. The mobile terminal 1 may also comprise various other memories shown collectively as a second memory 111. The second memory 111 may comprise a read only memory (ROM), a RAM, and/or a subscriber identity module (SIM) card. In the second memory 111, a plurality of constants and variables may be stored.

010925 LB G:\PI\276 Ericsson\PI189_1_FAST-IN-PLACE_00INTERLEAVING\PI189_10189_010925_inisnad screen 27.doc

10

which may be used by e.g. any processor of the mobile terminal 1. The second memory 111 may store computer readable instructions for carrying out the method according to the invention when run by a controller device, such as a processor 120. The processor 120 comprises circuitry required for implementing the logic functions for deinterleaving an array of data items within a set of memory locations of the memory 110 according to the method of the invention. The processor 120 may be comprised of one or several digital signal processors, microprocessors, various analog and digital converters, ASICs (Application Specific Integrated Circuits), and hard-wired logic circuitry.

The processor 120 together with the buffer 110 may form a deinterleaver 130 for deinterleaving data items stored in the buffer, as will be explained below. A decoder 140, which is adapted to decode the input data, is connected to the buffer 110 and output means. The output means may be connected to an audio mixer 200, which is adapted to mix decoded audio data with any other audio data, such as data for editing the output data. The output of the audio mixer 200 is connected to a post-processor 210, which may be provided for post-processing the mixed audio data. The post-processing may e.g. comprise filtering to decrease the noise level. The output of the post-processor 210 is connected to a D/A converter being adapted to convert the digital signal into an analog signal, which may be rendered by the loudspeaker 11. Else a loudspeaker or earphone may be operatively connected to the D/A converter e.g. through the accessory connector 17.

A first embodiment of the in-place method for sorting the interleaved data items according to the invention will be explained with reference to Figs. 3 and 4. In-place when used in this specification is intended to mean that the number of memory locations needed for sorting the array of

230929 58 0:\P\1974 Ericsson\P189_A_FAST_IN-PLACE_DEINTERLEAVING\21P\2740169_010929_inl6ered_0ns67an 57.doc

11

data items corresponds to the number of data items of the array, possibly together with any supplementary garbage data items as will be explained below.

In Fig. 3, each box represents a memory location, which may contain a data item. A grey box represents a memory location containing a data item relating to the first set of data items, and a white box represents a memory location containing a data item relating to the second set of data items. The input vector stored in the buffer 110 contains in this embodiment six data items. The memory locations of the buffer 110 are indexed from 0 to 5 starting from the first memory location of the buffer 110.

Fig. 4 illustrates a flowchart of the method according to the invention for deinterleaving the data items of the buffer 110. In a first step 300, the two first data items to be repositioned in a repositioning sequence are withdrawn from the buffer by the processor 120 and temporarily stored, e.g. in a register file 121 of the processor. In the embodiment of Fig. 3, a first and a second data item N1 and N2, respectively are withdrawn from the buffer 110. The data items are chosen such that one withdrawn data item relates to the first and one relates to the second set of data items. In Fig. 3 the data item having number 4 and number 3 stored at memory locations having index 1 and index 4, respectively, are withdrawn. The memory location not containing any data item is denoted H (Hole).

In a second step 310 of the Fig. 4, the destination position of the withdrawn data items are determined. In this embodiment, the data items are numbered. Thus the processor 120 may determine the index of the destination position of the data items (number-1=index of destination position). In the next step 320 it is determined whether the destination positions, wherein the withdrawn data items are to be inserted, contain any data item. If so, the

030929 28 0:\P11974 Ref:\P1199_A_FAST_15-PLACE_REINTERLAVING\PI19740189_030929_included.doc

13

In Fig. 5, the data items stored at the center positions are selected. This may be determined by calculating the holes as $HOLE1=LENGTH/2-1$ and $HOLE2=LENGTH/2$. In step 402, position variables POS1, POS2 are assigned the value of HOLE1, and HOLE2, respectively. In step 402, the values of the data items stored at the positions POS1 and POS2, are withdrawn from the buffer 110 and denoted N1 and N2, respectively. Also, a counter value I is set to 0 and an iteration stop value ISTOP is set to $(LENGTH-2)/2$, as the first and last data items of the buffer have their correct positions and two data items are repositioned in each repositioning sequence. In the embodiment of Fig. 5, the two data items stored at the center positions having index 7 and 8 of the buffer are selected as the indices of the first data items to withdraw. Also, it is possible to only withdraw one data item at each repositioning sequence. Withdrawing two data items at each repositioning sequence has the advantage that it limits the number of times the buffer has to be accessed for retrieving data items, and thus increases the speed of data processing. Furthermore, selecting the first positions or memory locations of data items to withdraw as the center positions or memory locations makes use of the inherent symmetry in a vector interleaved with data items relating to the first and the second set of data items alternately. This may also be achieved by choosing other positions, such as the second (index 1) and second last (index 14) position.

In step 404 it is determined whether all data items are repositioned. Thus, it is checked whether the counter value I is less than ISTOP. If the answer in step 404 is yes, the repositioning of the data items is finished and the procedure is ended. However, if the answer in step 404 is no, the procedure proceeds to step 405, wherein the indices of the destination positions of the data items withdrawn in step 403 are determined. Thus, POS1 and POS2

030929 13 0:\P\10-4 Ericsson\01109_A_PAT7_IN-PLACE_OTI\TFC\CA7\001\10:07101019_030929_inlammad_ano5kan_02.doc

14

are assigned the indices of the destination positions. The destination positions may be determined by checking a number of the data item. Alternatively, the destination position is determined according to a destination position
5 procedure `dest(POS,LENGTH)` having the index of the source position and the length of the buffer or vector as input, e.g. according to the procedure of Fig. 7, explained below.

In the next step 406 it is determined whether any of the indices of the destination positions comprises a hole H
10 (i.e. no data item) by e.g. determining if the new values of `POS1` and `POS2` correspond to the values of `HOLE1` and `HOLE2`, respectively. If the answer in step 406 is no, the procedure proceeds to step 407, wherein the data items presently stored at the determined destination positions,
15 presently `POS1` and `POS2`, are withdrawn and temporarily stored as `TEMP1` and `TEMP2`, respectively. Then, the value of the data items withdrawn in step 403, and stored as `N1` and `N2`, are inserted in their correct position in step 408. Thus, `N1` and `N2` are assigned the value of `TEMP1` and `TEMP2`,
20 respectively, in step 408. The data items withdrawn in step 403 are now repositioned, wherein the repositioning sequence is finished by incrementing the value of the counter value `I` by 1 in step 410. Then the procedure returns to step 404.

25 If the answer in step 406 is yes, a hole has been hit. In Fig. 5, this occurs during the fourth iteration. Then, the procedure proceeds to step 411 wherein the values of `N1` and `N2` are inserted at the destination positions set by `POS1` and `POS2`. Thus, the withdrawn data items `N1` and `N2`
30 are inserted at their correct positions directly without assigning any values to `TEMP1` and `TEMP2`. Now, there are no holes H in the array although all data items are not yet in their correct positions. Consequently, no data items will be temporarily stored in the register file although all
35 data items may not be positioned in their correct position.

In step 411, the indices of two new data items to withdraw are determined. To determine the indices of data items to withdraw, the processor has to try to select incorrectly positioned data items. According to this embodiment, if the first data items withdrawn in step 403 were chosen as the ones stored at the center positions, the data items at the positions next to the holes H are chosen whenever at hole H is hit, such as during repositioning sequence 4 and 7 of Fig. 5. In step 412 the indices of the new data items to withdraw are set to the indices of the positions next to the previous holes, i.e. $POS1=HOLE1-1$ and $POS2=HOLE2+1$.

The above-described scheme to select the location of new data items to withdraw ascertains that an incorrectly positioned data item is found. However, the processor may use another scheme for selecting an incorrectly positioned data item, which has to be tested and evaluated in each specific case.

After assigning new data items to withdraw, the index of the new holes HOLE1 and HOLE2 are in step 413 set to POS1 and POS2, respectively. In step 414, the data items stored at the memory locations having indices POS1 and POS2 are withdrawn and temporarily stored as N1 and N2. Then the repositioning sequence of the withdrawn data items proceeds to step 410.

The data items may not always be numbered. In such a case, the destination position of a withdrawn data item may be determined by calculating its destination position. Fig. 7 illustrates a method for determining the destination position. As input to the method for determining the destination positions $dest(POS, LENGTH)$ the source position POS and the length LENGTH of an acceptable vector or buffer are used. Then, the index of the destination position or correct memory location of a data item having index POS of a vector having length LENGTH may be determined. In a first step 500 of Fig. 7, it is determined whether the index POS

020229 18 3-10\1074 Ericsson\7\169_2_FAST_TU-PLACE_GS-INTERLEAVING\2\11740119_030229_included_andokan_87.doc

16

of the position from which a data item is withdrawn is even. If the answer in step 500 is yes, index of the destination position is set to $POS/2$ in step 501. However, if the answer in step 500 is no, the index of the destination position is set to $LENGTH/2+POS/2$ in step 502.

The processor 120 may be arranged to determine the destination position of a withdrawn data item by either reading its number or calculating its correct position. Furthermore, the processor may determine that all data items are positioned correctly by e.g. keeping track of the number of repositionings being executed, such as incrementing the counter value I as described above. By knowing the number of data items in the buffer 110 or the number of memory locations within the buffer, the number of executed repositionings should always be the number of data items or memory locations minus two.

The buffer size that may be used according to the present invention is not limited to the embodiments shown in Figs. 3 and 5. However, if the method for selecting the data items that are not correctly positioned described above is used, there is a limitation to what buffer sizes can be deinterleaved by the algorithm according to the invention. The buffer size that may be used according to the invention may be determined according to the method illustrated in Fig. 8. In a first step 600, a vector V comprising interleaved numbers according to a given length is created. The vector may e.g. be given by the vector $\{1,4,2,5,3,6\}$. The first and last data items of the vector should have their correct positions. In a second step 610, the sorting algorithm e.g. according to Fig. 6 explained above, is run on the vector created in step 600. When the sorting of the vector is finished, it may be determined in step 620 whether all elements of the vector are in their correct positions. If the vector was created e.g. as above, the determination may be executed by checking whether the

030919 18 01/10/2003 Ericsson\PI189_A_PAST_IN-PLACE_DEINTERLEAVING\170740195_030919_inl00003 SENDK02 RF.CC2

17

values of all data items of the vector, except the first one, are greater than the value of the preceding data item, such as that the above vector interleaved will have the order (1,2,3,4,5,6). If the answer in step 630 is yes, the
5 vector length is acceptable. However, if the answer in step 630 is no, the vector length is not acceptable, and the procedure may return to step 600, wherein a vector having a different length may be tested.

If it is desired to use a vector or buffer being of a
10 length that is not acceptable according to the sorting algorithm of the invention, such a vector may be complemented with a number of garbage data items when read into the buffer 110 to obtain a vector having acceptable length. The garbage data items are positioned in the
15 beginning of the buffer starting at index 0. A vector comprising e.g. 2048 data items is not acceptable if the data items to reposition are chosen as described above. The next acceptable vector length is 2054. Thus, a buffer having 2054 memory positions may be used. To deinterleave
20 the vector of length 2048, 6 garbage data items are read into the buffer of length 2054 before said vector is read into the buffer. Then, the data items of the vector may be deinterleaved. By keeping track of the number of garbage data items used, the correct vector may be retrieved when
25 deinterleaved.

The present invention has been described above with reference to specific embodiments. However, other embodiments than the above described are equally possible within the scope of the invention. Different method steps
30 than those described above, performing the method by hardware or software, may be provided within the scope of the invention. The different features and steps of the invention may be combined in other combinations than those described. The invention is only limited by the appended
35 patent claims.

To be published together with Fig. 4.

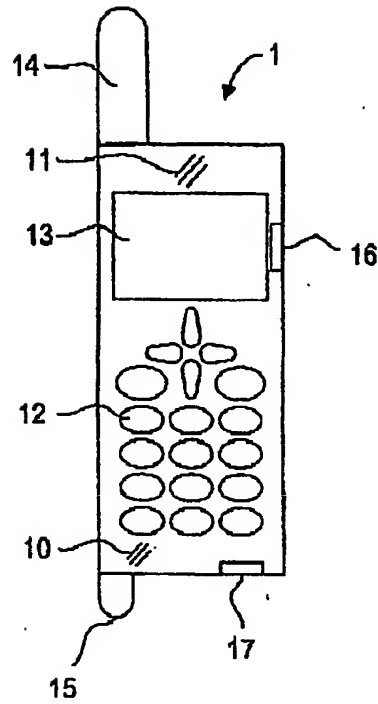


Fig. 1

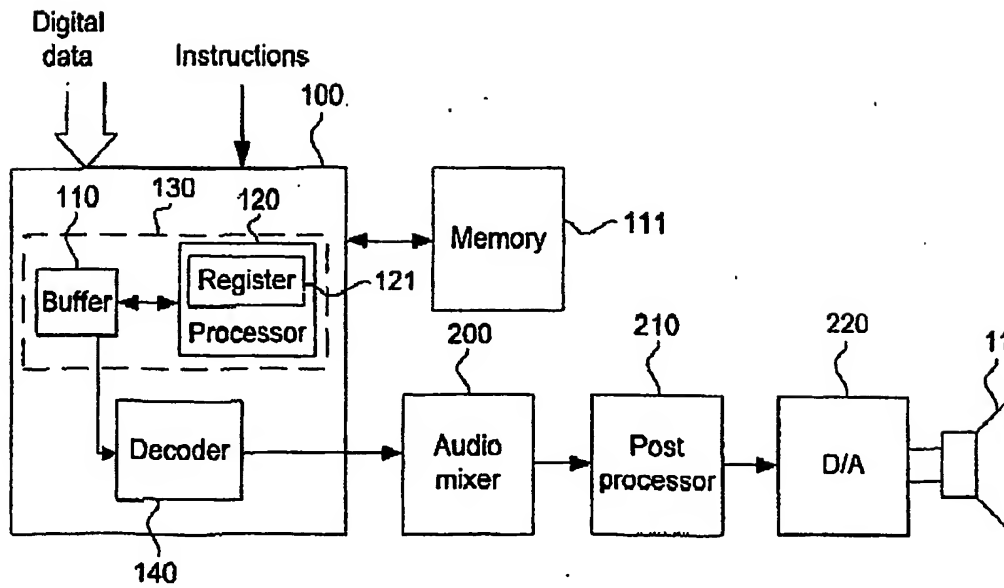


Fig. 2

2/6

| | | | | | |
|---|---|---|---|---|---|
| 1 | 4 | 2 | 5 | 3 | 6 |
| 1 | H | 2 | 5 | H | 6 |
| 1 | H | 3 | 4 | H | 6 |
| 1 | 2 | 3 | 4 | 5 | 6 |

Fig. 3

3/6

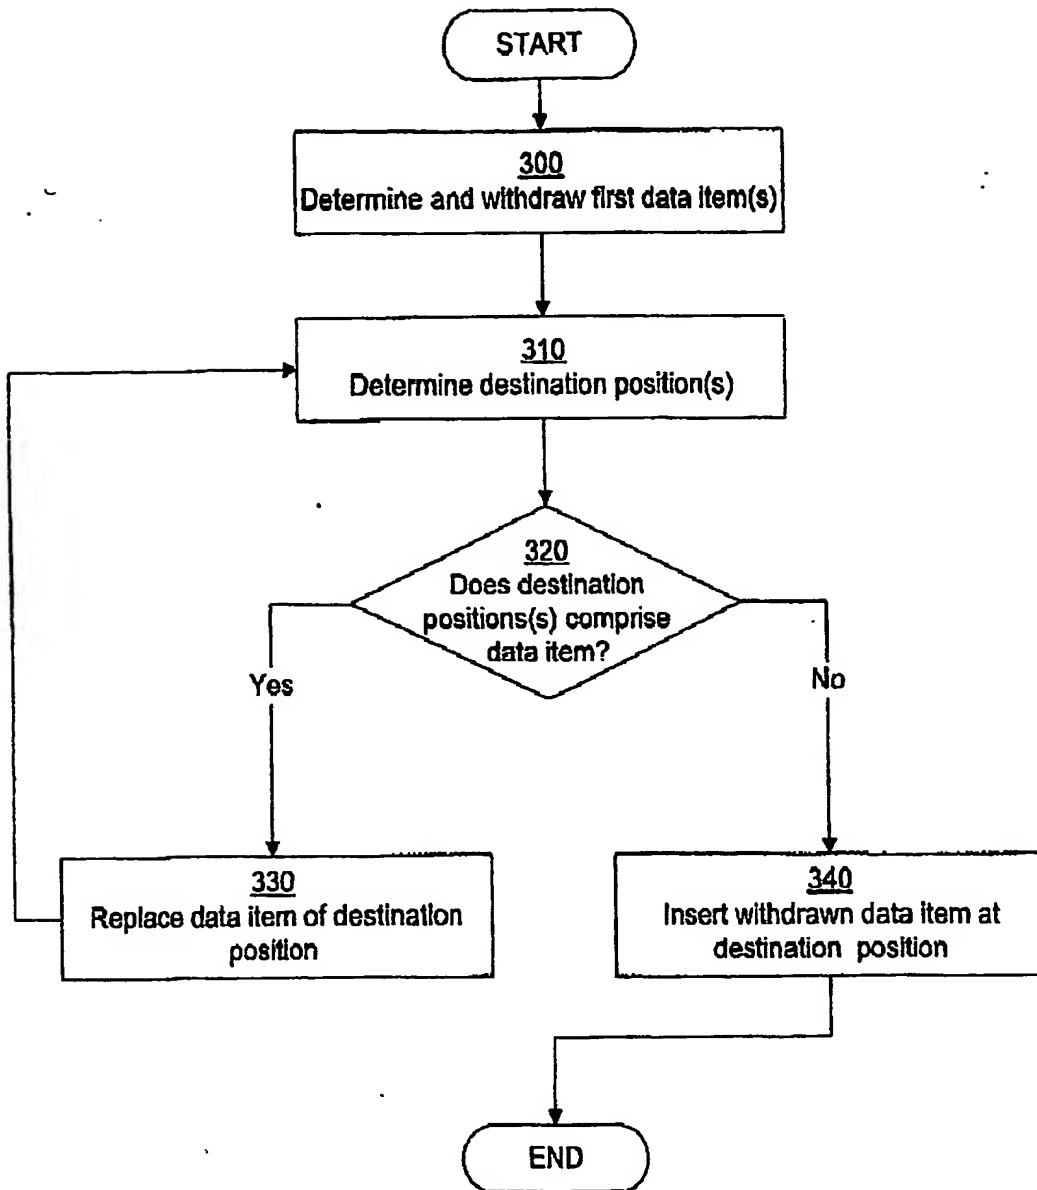


Fig. 4

4/6

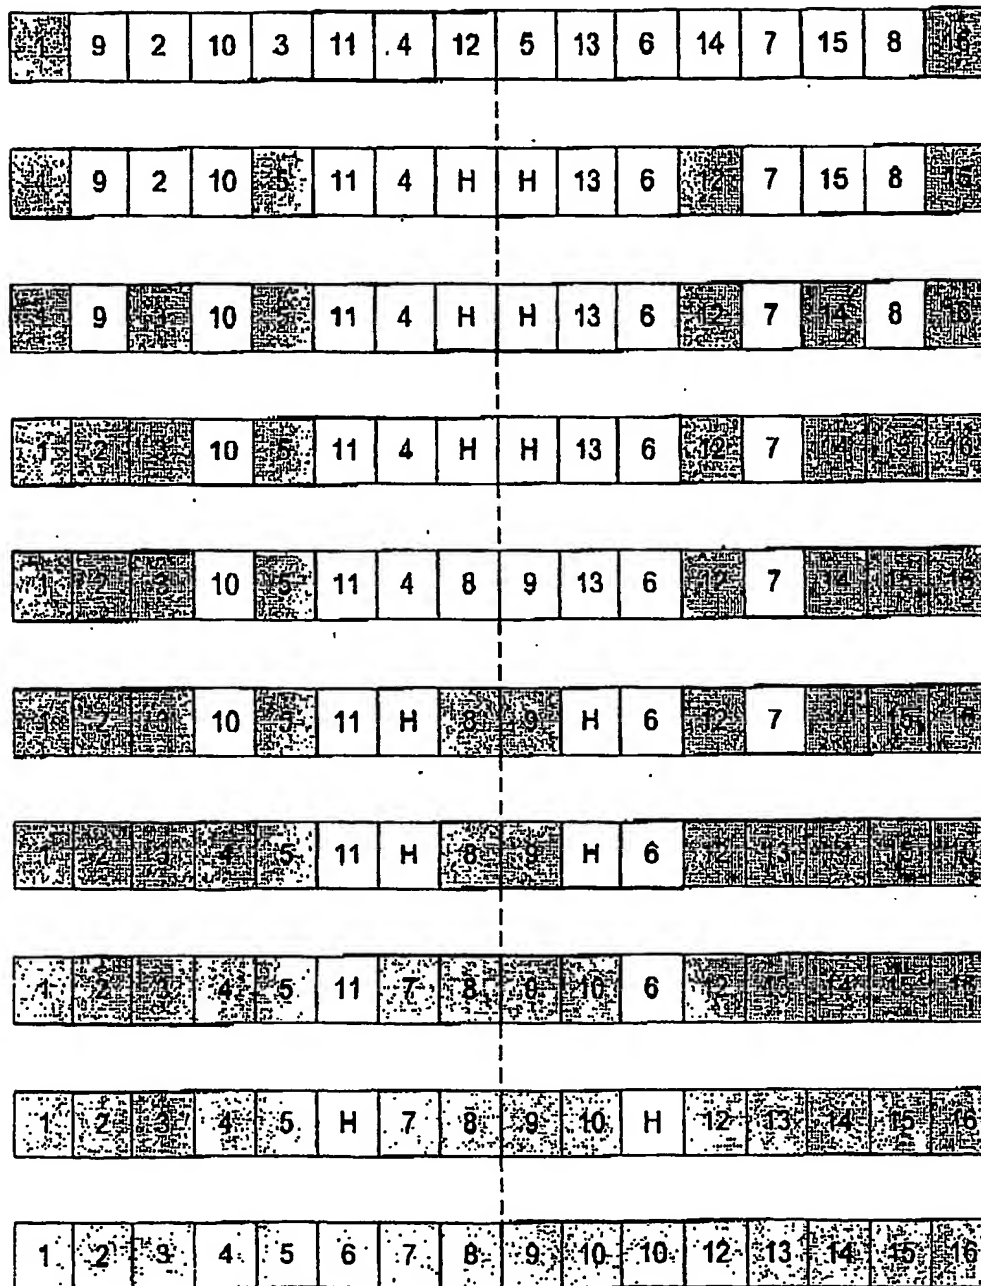


Fig. 5

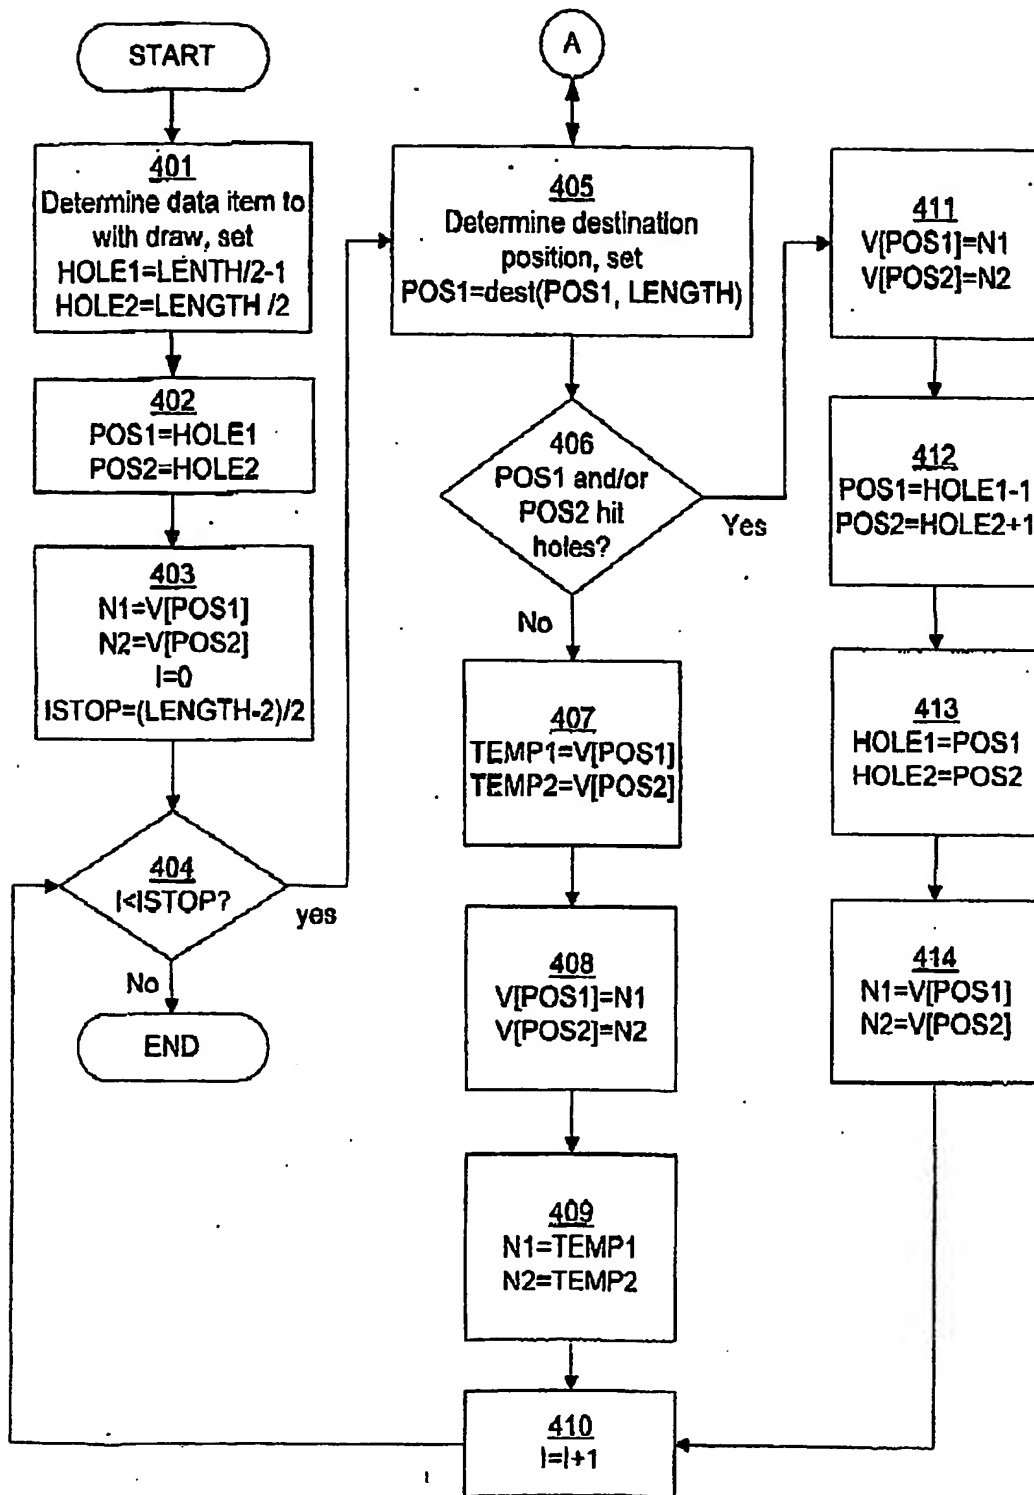


Fig. 6

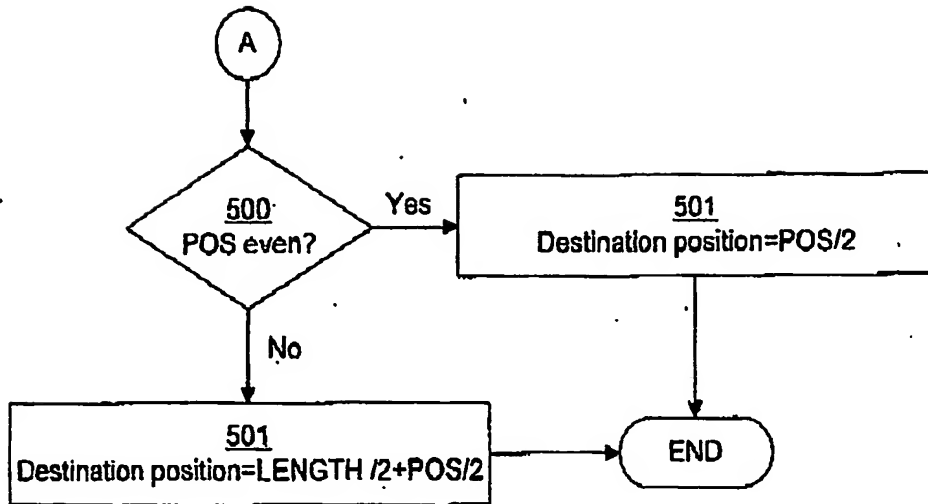


Fig. 7

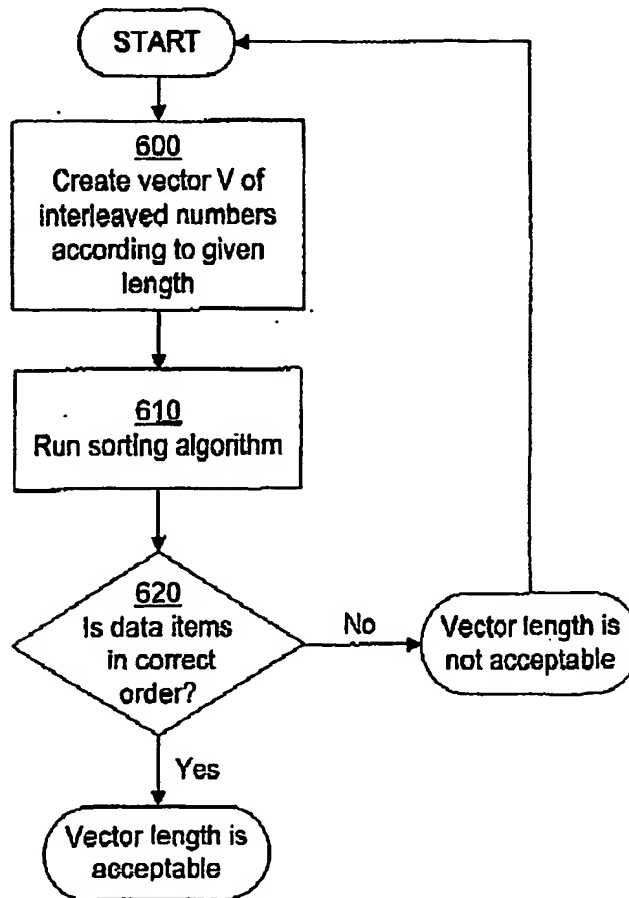


Fig. 8

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record.**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☒ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.